

Transporters
HT-2, HT-3



HAPERT INDIGO
TRANSPORTERS



INDIGO HT: AN EFFICIENT ALL-ROUND TRANSPORTER

The Indigo HT is a solid tiltable transporter. Thanks in part to its 100-cm continuous tailgate and the double-acting hydraulic system, it's flexible and can quickly be prepared to transport 3 or 4-wheel machines and other vehicles.

This Indigo comes as standard with a tailgate, multiplex floor (an aluminium-profile floor is possible too), 195/50 R13 C tyres and a strong, adjustable winch with winch bracket. This model also features a Combi Protect Rail on the sides and front. The models in 450 and 505 cm length are as standard provided with parabolic suspension including shock absorbers for a very well driving comfort and optimum road handling!

All in all, this transporter will efficiently and safely transport any car and/or machine!

**BRING
IT ON.**

HT-2



HT-3



STANDARDS, OPTIONS, AND ACCESSORIES




INDIGO

TRANSPORTERS



Standard: a double functioning tilting system, a 3,5t. coupling and a fixed Combi Protect Rail 80mm high.



Standard: with TÜV certified load securing system with 1000 daN (Kg) for each fixing point.



Option: adjustable wheel chock model Combi Protect Rail.



Option: adjustable wheel chock model Combi Protect Rail with 2 movable black plastic wheel chocks.



Standard: Parabolic leaf spring axles incl. shock absorbers for the models in 450 and 505 cm length (lowered floor height with parabolic axles!).



Parabolic leaf spring axles incl. shock absorbers (parabolic axles not possible for models in 405 cm).



Standard: tyres 195/50 R13 C with black rims for the models in 450 and 505 cm with parabolic leaf spring axles.



Standard: a multi-adjustable winch with support mounted in front.



Standard: a tailramp 100 cm high including a gas spring and heavy duty fasteners.




Option: aluminium dropsides 300mm and a ladderrack in front. (a ladderrack is only possible in combination with dropsides).



Option: weldmesh extension 75 cm high on the sides and in front. The tailramp is made of steel with an open, anti-slip structure.



Option: LED-lights.

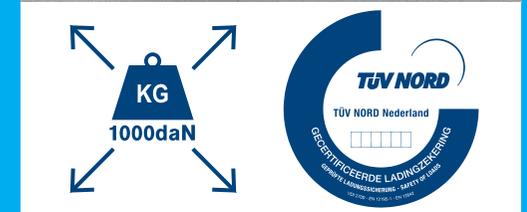

All Hapert trailers have been provided with the TÜV certified load-securing system!




Option: models in 455 and 505 cm length are available as a 3 axle trailer and when with aluminium dropsides then the with removable centerposts.



Option: high cover in 180 or 210 cm high and the frame construction is removable and modular.



Option: high covers are only possible in combination with aluminium dropsides.



Option: a sloping roof is standard. HT models in 450 or 500 cm are as standard assembled with central posts on the sides.



HAPERT

TRAILERS

WWW.HAPERT.COM